

HF Horns

H1-7050 'NO BELL'

Compression driver horn

- Compatible for use with bolt (flange) fitted compression drivers
- Features embedded elastomer side panels that make it acoustically inert

1in

Throat exit

70° x 50°

Radiation pattern

1.5kHz

Cut-off frequency

General Specifications

|                   |                |
|-------------------|----------------|
| Horn type         | Exponential    |
| Horn material     | Cast aluminium |
| Radiation pattern | 70° x 50°      |
| Cut off frequency | 1.5kHz         |


Mounting Information

|                |                                      |
|----------------|--------------------------------------|
| Height         | 180mm / 7.1in                        |
| Width          | 180mm / 7.1in                        |
| Depth          | 90mm / 3.54in                        |
| Baffle cut-out | 155mm / 6.1in diameter               |
| Fitting        | Bolt (2xM6 holes on PCD)<br>76mm/3in |
| Throat exit    | 25.1mm / 1in                         |
| Unit weight    | 0.7kg / 1.5lb                        |

Packed Dimensions & Weight

|                            |                                                   |
|----------------------------|---------------------------------------------------|
| Single pack size W x D x H | 190mm x 190mm x 65mm / x<br>7.5in 7.5in x 2.6in   |
| Single pack weight         | 1.0kg / 2.2lb                                     |
| Multi pack qty             | 24                                                |
| Multi pack size W x D x H  | 390mm x 390mm x 560mm / x<br>15.4in 15.4in x 22in |
| Multi pack weight          | 18kg / 39.6lb                                     |

Horizontal Polar

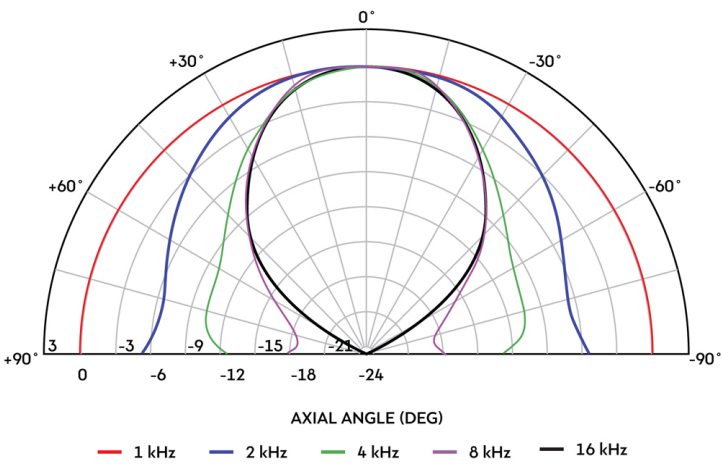

Vertical Polar

