



Waterfall



Z

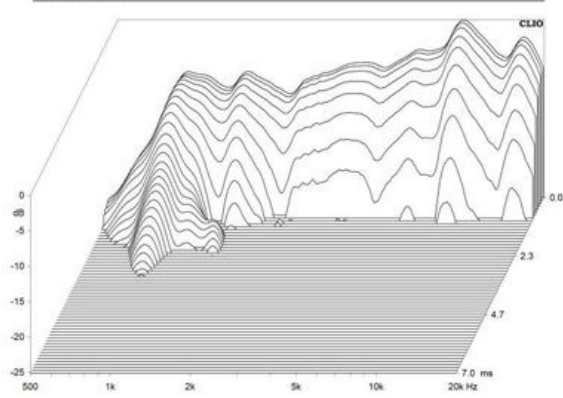

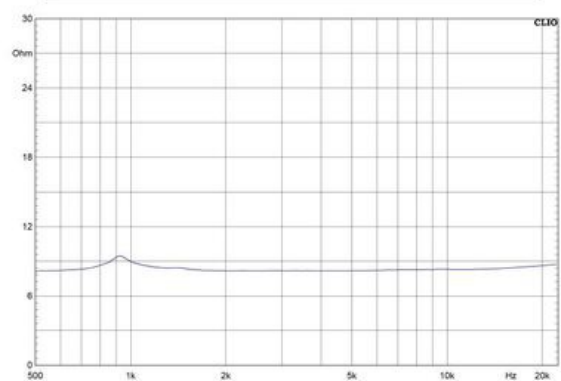

# AMT100H 8Ω

## HF Drivers - 3.0 Inches

### SPECIFICATIONS<sup>1</sup>

Nominal Impedance	8 Ω
Minimum Impedance	7.9 Ω
Nominal Power Handling <sup>2</sup>	25 W
Continuous Power Handling <sup>3</sup>	50 W
Sensitivity <sup>4</sup>	93.0 dB
Frequency Range	800.0 - 20000.0 kHz
Recommended Crossover <sup>5</sup>	1200.0 kHz

### MOUNTING AND SHIPPING INFO

Over all rectangular throat dimension: 80x100mm (3.15x3.94in)	
4x4xM6 Holes	
Bolt circles geometry: 70x90mm (2.75x3.54in)	
Depth	65 mm (2.58 in)
Net Weight	0.85 kg (1.87 lb)
Shipping Weight	1.2 kg (2.65 lb)
Shipping Box	120x110x70 mm (4.72x4.33x2.76 in)

1. Driver mounted on Eighteen Sound XR1464C horn
2. 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated nominal impedance.
3. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
4. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
5. 12 dB/oct. or higher slope high-pass filter.